



Module 15 Panel

Product Code: MDL-PA 15/X
Model No: 12210015



High-definition optics made of high quality pmma material, integrated in the mirror antiglare screen that defines emission with luminance control UGR<13.

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted, Suspended or T-Bar Ceiling

Body and Heatsink : Aluminium Extrusion Body and Aluminium Injection End Caps

Lens : PMMA

Body Color : Electrostatic Powder Coating

Led : Osram High Power

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 36° / 35x70° / Assymetric

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:200mm L:900mm

Montaj Tipi : Sıva Üstü , Sarkıt veya Taşyünü Tavan

Gövde ve Soğutucu : Alüminyum Ekstrüzyon Gövde ve Alüminyum Enjeksiyon Sonlandırma Kapakları

Lens : PMMA

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram High Power

Sürücü : Tridonic / Philips / Osram / Eaglerise


Açı Seçenekleri : 36° / 35x70° / Asimetrik

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI


Ürün Ölçüleri : Y:70mm G:200mm U:900mm

Beam Informations And Technicals / Teknik ve Açısal Bilgiler

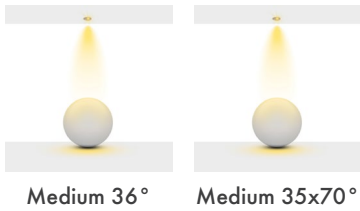

Medium 36°

Medium 35x70°

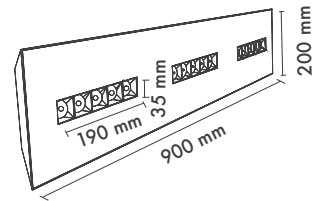

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Osram High Power	6700 lm	7100 lm	7500 lm	75 Watt	>80
Osram High Power	9500 lm	10000 lm	10500 lm	105 Watt	>80



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





London Panel 15

Product Code: MTP-60x60 L15
Model No: 14006015



High-definition optics made of high quality pmma material, integrated in the mirror antiglare screen that defines emission with luminance control UGR<13.

Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted or Suspended

Body and Heatsink : Aluminium Injection Body and Heatsink

Body Color : Electrostatic Powder Coating

Led : Samsung Power Led

Driver : Tridonic / Philips / Osram / Eaglerise

Beam Options : 15° / 40°

Protection Type : IP20 / IP23 (Visible Surface After Installation)

UGR : <13

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:600mm L:600mm

Montaj Tipi : Sıva Üstü veya Sarkıt

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung Power Led

Sürücü : Tridonic / Philips / Osram / Eaglerise

Açı Seçenekleri : 15° / 40°


Koruma Sınıfı : IP20 / IP23 (Kurulmdan Sonra Görünür Yüzey)

UGR : <13

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:600mm U:600mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

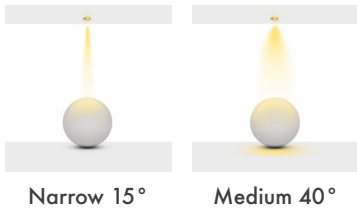

Narrow 15°

Medium 40°

	2700K Lumen	3000K Lumen	4000K Lumen	Watt	CRI
Samsung Power Led	7350 lm	7800 lm	8550 lm	75 Watt	>80



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596



FAMILY NAME: LOTUS FAMILY



Lotus Recessed 12x12
Recessed Panel Light

P: 437



Lotus Recessed 18x18
Recessed Panel Light

P: 438



Lotus Surface 18x18
Surface Mounted Panel
Light

P: 439



Lotus Surface 22x22
Surface Mounted Panel
Light

P: 440



Lotus Surface 24x24
Surface Mounted Panel
Light

P: 441



Lotus Surface 30x30
Surface Mounted Panel
Light

P: 442




Lotus Surface 60x60
Surface Mounted Panel
Light

P: 443




Lotus Clip-in 60x60
Clip-in Panel Light

P: 444




Lotus T-Bar 60x60
T-Bar Panel Light

P: 445



Lotus Y T-Bar 60x60
T-Bar Panel Light

P: 446



Lotus Y Clip-in 60x60
T-Bar Panel Light

P: 447



Lotus Steril 60x60
Steril Panel Light

P: 448

LOTUS FAMILY

With its classic type, different sizes, high-quality components, well-designed structure, Lotus products will offer you a joyful journey to find what you desire while decorating your space. Lotus offers you 5 installation variants.

T-Bar
Clip-in
Recessed
Surface Mounted
Suspended

Best in class panel lighting with high lumen and low depth structure. The favored family group in the panel light category in the all areas. The best in its category with its high efficient smd led and **50,000+** lifetime driver.

This product guide will help you to find what you're looking for by finding the range of Lotus product models. Follow this light. You can visit our site to closely find many product groups and product models, and visit metsanlighting.com/en/support for installation manuals of the products.





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : \varnothing 105x105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:120mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : \varnothing 105x105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:120mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



120 mm / 150 mm / 180 mm
220 mm / 300 mm

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : 160x160mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:175mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : 160x160mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:175mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:166mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:166mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



105°



166 mm / 209 mm / 286 mm
595 mm / 595 mm

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:209mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:209mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:235mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:235mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

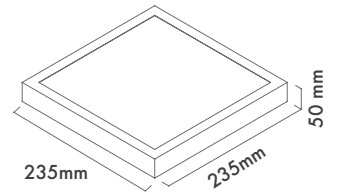

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Surface Mounted

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:286mm

Montaj Tipi : Sıva Üstü

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram



Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20 / IP44

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:286mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2585 lm	2703 lm	2820 lm	350	23 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596






Product Specification / Ürün Özellikleri


Installation Type : Surface Mounted or Pendant
Body and Heatsink : DKP Metal Body and frame
Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)
Body Color : Electrostatic Powder Coating
Led : Samsung
Driver : Tridonic / Philips / Osram / Eaglerise
Protection Type : IP20 / IP54
Dimming Options : Phase-Cut / 1-10 V / DALI
Product Dimensions : H:50mm W:595mm

Montaj Tipi : Sıva Üstü veya Sarkıt
Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve
Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)
Gövde Rengi : Elektrostatik Toz Boya
Led : Samsung
Sürücü : Tridonic / Philips / Osram / Eaglerise
Koruma Sınıfı : IP20 / IP54
Dim Opsiyonları : Triak / 1-10 V / DALI
Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



105°



166 mm / 209 mm / 286 mm
595 mm / 595 mm

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3550 lm	3650 lm	3750 lm	700	32 Watt	>85
Samsung	4350 lm	4450 lm	4550 lm	900	42 Watt	>85
Samsung	4800 lm	4900 lm	5000 lm	1050	48 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Clip-in Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Clip-in Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20



Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



Clip-in System

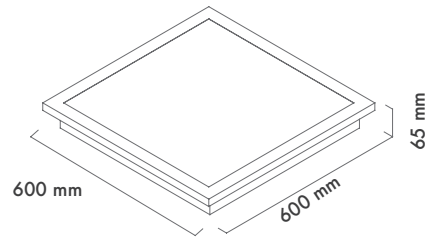

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3550 lm	3650 lm	3750 lm	700	32 Watt	>85
Samsung	4350 lm	4450 lm	4550 lm	900	42 Watt	>85
Samsung	4800 lm	4900 lm	5000 lm	1050	48 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Lotus T-Bar 60x60

Product Code: MAT 60x60
Model No: 14216060

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Taşyünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI



Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



105°

T-Bar System

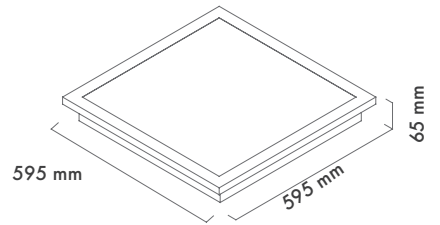

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3550 lm	3650 lm	3750 lm	700	32 Watt	>85
Samsung	4350 lm	4450 lm	4550 lm	900	42 Watt	>85
Samsung	4800 lm	4900 lm	5000 lm	1050	48 Watt	>85



Available Finishes
Uygulama Renkleri


● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596



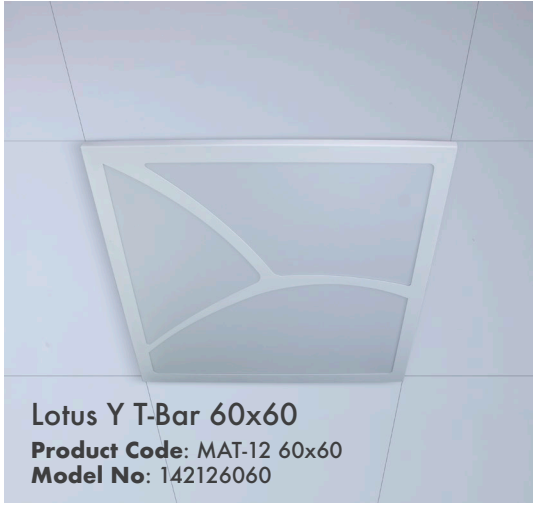

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Taşyünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20



Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



T-Bar System

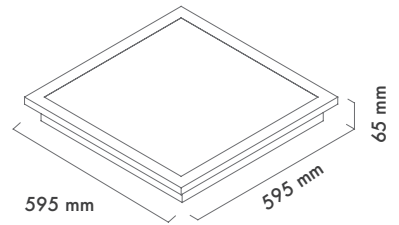

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3550 lm	3650 lm	3750 lm	700	32 Watt	>85
Samsung	4350 lm	4450 lm	4550 lm	900	42 Watt	>85
Samsung	4800 lm	4900 lm	5000 lm	1050	48 Watt	>85



Available Finishes
Uygulama Renkleri


Textured White
Ral 9016

Textured Grey
Ral 9006

Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596



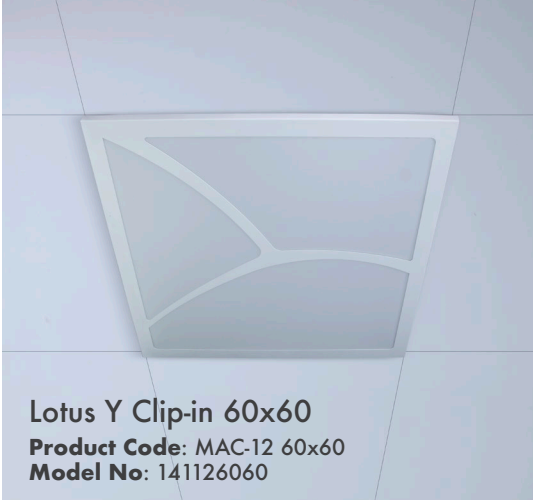

Product Specification / Ürün Özellikleri

Installation Type : Clip-in Ceiling

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Samsung

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Clip-in Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung




Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP20

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

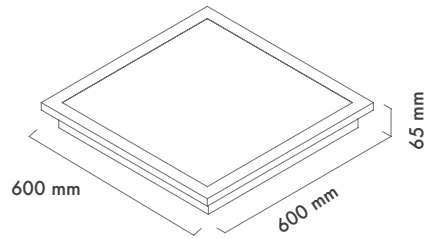

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Samsung	3550 lm	3650 lm	3750 lm	700	32 Watt	>85
Samsung	4350 lm	4450 lm	4550 lm	900	42 Watt	>85
Samsung	4800 lm	4900 lm	5000 lm	1050	48 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Lotus Steril 60x60

Product Code: MAT-ST 60x60
Model No: 14116060



Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceililing

Body and Heatsink : DKP Metal Body and frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Glass Option : Tempered Glass

Body Color : Electrostatic Powder Coating

Led Brands : Samsung

Driver Brands : Tridonic

Protection Type : IP65

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:50mm W:595mm

Montaj Tipi : Taş Yünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Cam Opsiyonu : Temperli Cam

Gövde Rengi : Elektrostatik Toz Boya

Led : Samsung


Sürücü : Tridonic / Philips / Osram / Eaglerise

Koruma Sınıfı : IP65

Dim Opsiyonları : Triak / 1-10 V / DALI



Ürün Ölçüleri : Y:50mm G:595mm

Beam Informations And Technicals / Teknik ve Açılal Bilgiler



105°

T-Bar System

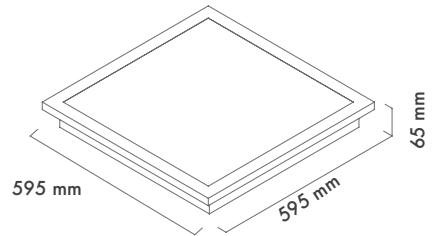

3000K Lumen

4000K Lumen

5000K Lumen

Watt

CRI

	3000K Lumen	4000K Lumen	5000K Lumen	Watt	CRI
Samsung	4350 lm	4450 lm	4550 lm	42 Watt	>85



For Hospital Application

Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : Aluminium Injection Body and Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : \varnothing 105x105mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:120mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : Alüminyum Enjeksiyon Gövde ve Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : \varnothing 105x105mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:120mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler

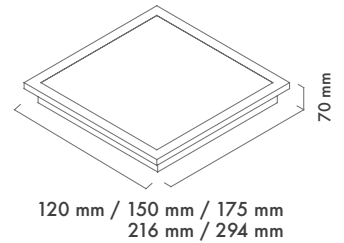

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	540 lm	570 lm	600 lm	350	6 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : ∅ 135x135mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:150mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : ∅ 135x135mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:150mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1000 lm	1050 lm	1100 lm	350	10 Watt	>85



Available Finishes
 Uygulama Renkleri

● Textured White
 Ral 9016

● Textured Grey
 Ral 9006


● Textured Black
 Ral 9005

*For more page : 596
 *Diğer renkler : 596




**Eliza 18x18**

Product Code: MA 18x18 72
Model No: 14021818

Product Specification / Ürün Özellikleri**Installation Type :** Recessed**Body and Heatsink :** DKP Metal Body and Aluminium Heatsink**Diffuser Options :** Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)**Body Color :** Electrostatic Powder Coating**Led :** Osram**Driver :** Tridonic / Philips / Osram / Eaglerise**Protection Type :** IP20 / IP44**Hole Size :** \varnothing 165x165mm**Dimming Options :** Phase-Cut / 1-10 V / DALI**Product Dimensions :** H:70mm W:175mm**Montaj Tipi :** Sıva Altı**Gövde ve Soğutucu :** DKP Metal Gövde ve Alüminyum Soğutucu**Difüzör Çeşitler :** Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)**Gövde Rengi :** Elektrostatik Toz Boya**Led :** Osram**Sürücü :** Tridonic / Philips / Osram / Eaglerise**Koruma Sınıfı :** IP20 / IP44**Delik Çapı :** \varnothing 165x165mm**Dim Opsiyonları :** Triak / 1-10 V / DALI**Ürün Ölçüleri :** Y:70mm G:175mm**Beam Informations And Technicals / Teknik ve Açısıl Bilgiler**

105°





120 mm / 150 mm / 175 mm
 216 mm / 294 mm


	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	1760 lm	1840 lm	1920 lm	350	16 Watt	>85



Available Finishes
 Uygulama Renkleri

 Textured White
 Ral 9016

 Textured Grey
 Ral 9006

 Textured Black
 Ral 9005

*For more page : 596
 *Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : ∅ 200x200mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:216mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise



Koruma Sınıfı : IP20 / IP44

Delik Çapı : ∅ 200x200mm

Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:216mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



120 mm / 150 mm / 175 mm
216 mm / 294 mm

	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

● Textured White
Ral 9016

● Textured Grey
Ral 9006

● Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596





Product Specification / Ürün Özellikleri

Installation Type : Recessed

Body and Heatsink : DKP Metal Body and Aluminium Heatsink

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Eaglerise

Protection Type : IP20 / IP44

Hole Size : \varnothing 280x280mm

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:70mm W:294mm

Montaj Tipi : Sıva Altı

Gövde ve Soğutucu : DKP Metal Gövde ve Alüminyum Soğutucu

Difüzör Çeşitler : Opal Polisitren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram

Sürücü : Tridonic / Philips / Osram / Eaglerise


Koruma Sınıfı : IP20 / IP44

Delik Çapı : \varnothing 280x280mm


Dim Opsiyonları : Triak / 1-10 V / DALI

Ürün Ölçüleri : Y:70mm G:294mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



105°





120 mm / 150 mm / 175 mm
216 mm / 294 mm


	3000K Lumen	4000K Lumen	5000K Lumen	mA	Watt	CRI
Osram	2310 lm	2415 lm	2520 lm	350	21 Watt	>85



Available Finishes
Uygulama Renkleri

 Textured White
Ral 9016

 Textured Grey
Ral 9006

 Textured Black
Ral 9005

*For more page : 596
*Diğer renkler : 596







Lotus Seg T-Bar 60x60
Product Code: MAT SEG 60x60
Model No: 24216060

Available Lotus Segment Sizes

- 30x60 T-Bar
- 30x120 T-Bar
- 60x120 T-Bar
- 30x60 Surface Mounted
- 60x60 Surface Mounted
- 30x120 Surface Mounted
- 60x120 Surface Mounted

Product Specification / Ürün Özellikleri

Installation Type : T-Bar Ceiling

Body and Heatsink : DKP Metal Body and Frame

Diffuser Options : Opal Polystyren / Opal PMMA (Fire-Proof) / Microprismatic (3D)

Body Color : Electrostatic Powder Coating

Led : Osram

Driver : Tridonic / Philips / Osram / Lifud / Eaglerise

Protection Type : IP54

Dimming Options : Phase-Cut / 1-10 V / DALI

Product Dimensions : H:32mm W:595mm

Montaj Tipi : Taşyünü Tavan

Gövde ve Soğutucu : DKP Metal Gövde ve Çerçeve

Difüzör Çeşitler : Opal Polistiren / Opal PMMA (Alev Almaz) / Mikroprizmatik (3B)

Gövde Rengi : Elektrostatik Toz Boya

Led : Osram


Sürücü : Tridonic / Philips / Osram / Lifud / Eaglerise

Koruma Sınıfı : IP54

Dim Opsiyonları : Triak / 1-10 V / DALI



Ürün Ölçüleri : Y:32mm G:595mm

Beam Informations And Technicals / Teknik ve Açısıl Bilgiler



110°

T-Bar System

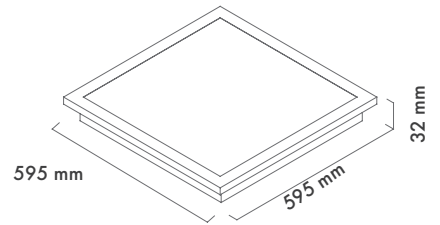

	3000K Lumen	4000K Lumen	6500K Lumen	Watt	CRI
Osram	4750 lm	5050 lm	5300 lm	42 Watt	>82
Osram	5700 lm	6000 lm	6300 lm	50 Watt	>82





Chrome
Chrome

Metsan
05



Gold
Altın

Metsan
06



Chrome Satin
Chrome Satın

Metsan
07



Gold Satın
Gold Satın

Metsan
08



Chrome Patına
Chrome Eskitme

Metsan
12



Gold Patına
Altın Eskitme

Metsan
13



Cooper Patına
Bakır Eskitme

Metsan
14



Platin
Platin

Metsan
15



Copper
Bakır

Metsan
17



Innovative Lighting Factory

ABOUT METSAN

With partners in more than 28 countries and business activities in more than 55 countries, METSAN is one of the existing largest lighting fixture models with its portfolio in the world. METSAN offers a wide ranging assortment of LED luminaires as well as with spot cases for led bulbs for indoor lighting. We focus high quality items for all product ranges.

METSAN Turkey Headquarters
Ömerli Mh. Özçınar Sk. No:22 Hadımköy
Arnavutköy / İstanbul / TURKEY
T. +90 212 798 35 35
F. +90 212 798 35 36

www.metsanlighting.com